

CATALOGUE 2021

cod. IC00000EN



ZILLI srl

We cultivate passion for the land since 1952

Since 1952, we manufacture agricultural machinery using the best materials available on the market and, in these years, our handicraft experience has grown step by step with technology, producing innovative solutions intended to last over time.

The ZILLI company is located in the green countryside between San Quirino and Pordenone, just a few kilometers from the A28 highway junction.

The production line and various offices are located in a building of 3000 sqm, flanked by an outdoor area of 4000 sqm and also 6000 sqm of test fields dedicated to the R&D department tests.





The ZILLI company was founded in 1952 by the Zilli brothers Guerrino and Giuseppe, driven by their passion for mechanics and farming.

In the historical premises in Pordenone, at that time, they produced corn shellers, grape presses and forage loaders. The company ZILLI, has filed numerous patents and received many awards for innovations during farming exhibitions and trade fairs.

In 1977 the company moved to a new facility in San Quirino and, in 1978 they started the production of shredders. In 2018 ZILLI S.r.l. renews its company profile; technology has grown together with experience while maintaining the handicraft care that distinguished the company since 1952.



SHREDDERS

The ZILLI shredders are 3-point hitch tractor mounted machines. They are equipped with support roller or pivoting wheels for the working height adjustment. ZILLI shredders are equipped with low maintenance bearings. They can be equipped with hammer type or standard blades according to the customer's choice.


The agricultural equipment produced by ZILLI S.r.l are manufactured with quality steels, in compliance with the European Standards.



PICO Grass shredder from 850 to 1200 mm width




3-point hitch mounted shredder, especially suitable for grass cutting on parks, gardens and small areas. Appropriate for small power tractors.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|---|---|---|---|---|----|------|-----|-----|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2920.850 | 860 | 520 |  450 | 6 | 8 | 2 | 540 | 110 | 1 | 14 | 28 | 970 | 650 | 850 |
| 2920.100 | 970 | 520 |  560 | 7 | 10 | 2 | 540 | 120 | 1 | 16 | 32 | 1080 | 650 | 850 |
| 2920.110 | 1080 | 630 |  560 | 9 | 13 | 2 | 540 | 145 | 1 | 18 | 36 | 1190 | 650 | 850 |
| 2920.120 | 1200 | 630 |  670 | 11 | 15 | 2 | 540 | 160 | 1 | 20 | 40 | 1300 | 650 | 850 |

ERBA Grass shredder from 1000 to 1600 mm width




The ERBA model is a 3-point hitch mounted shredder, mainly recommended for grass mowing, in parks, gardens and vineyards, it is also suitable to shred thin branches. It can be used with tractors with a minimum power of at least 15 HP.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|--|---|---|---|---|---|---|---|----|------|-----|------|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2904.100 | 1000 | 620 |  560 | 11 | 15 | 3 | 540 | 215 | 2 | 12 | 24 | 1180 | 910 | 1000 |
| 2904.120 | 1200 | 620 |  760 | 12 | 16 | 3 | 540 | 230 | 2 | 12 | 24 | 1380 | 910 | 1000 |
| 2904.140 | 1400 | 540 690 |  1040 890 | 14 | 20 | 3 | 540 | 250 | 2 | 16 | 32 | 1580 | 910 | 1000 |
| 2904.160 | 1600 | 580 730 |  1200 1050 | 18 | 25 | 3 | 540 | 270 | 2 | 20 | 40 | 1780 | 910 | 1000 |

EDEN Grass shredder from 1200 to 1800 mm width




3-point hitch mounted shredder, recommended for cutting grass and wood with a diameter from 3 to 4 cm. EDEN is suitable to be used in vineyards, gardens and parks. It is equipped with a self-cleaning rear roller with ejection of the residues downstream. The lateral shifting occurs on cylindrical guides on which, self-lubricating bushings are sliding.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|---|---|---|---|---|----|------|-----|-----|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2905.120 | 1200 | 540 690 | 840 690 | 13 | 18 | 3 | 540 | 230 | 2 | 12 | 24 | 1360 | 940 | 860 |
| 2905.140 | 1400 | 540 690 | 1040 890 | 14 | 20 | 3 | 540 | 250 | 2 | 16 | 32 | 1560 | 940 | 860 |
| 2905.160 | 1600 | 540 690 | 1200 1050 | 18 | 25 | 3 | 540 | 270 | 2 | 20 | 40 | 1760 | 940 | 860 |
| 2905.180 | 1800 | 780 930 | 1200 1050 | 26 | 35 | 3 | 540 | 300 | 2 | 24 | 48 | 1960 | 940 | 860 |

ASSO Grass shredder from 1400 to 2200 mm width




The ASSO model is a 3-point hitch mounted shredder suitable for grass mulching and shredding of wood with 4 to 5 cm. diameter. The shredder moves on cylindrical guides. The residues are ejected behind the support roller.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|---|---|---|---|---|----|------|------|-----|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2908.140 | 1400 | 530 960 | 1050 620 | 22 | 30 | 3 | 540 | 360 | 3 | 16 | 32 | 1580 | 1050 | 970 |
| 2908.160 | 1600 | 530 960 | 1250 820 | 26 | 35 | 3 | 540 | 410 | 3 | 20 | 40 | 1780 | 1050 | 970 |
| 2908.180 | 1800 | 530 960 | 1450 1020 | 30 | 40 | 4 | 540 | 430 | 3 | 20 | 40 | 1980 | 1050 | 970 |
| 2908.200 | 2000 | 530 960 | 1650 1220 | 36 | 50 | 4 | 540 | 460 | 3 | 24 | 48 | 2180 | 1050 | 970 |
| 2908.220 | 2200 | 530 960 | 1850 1420 | 41 | 55 | 5 | 540 | 480 | 3 | 24 | 48 | 2380 | 1050 | 970 |

RAMA 4 RAMA shredder, working width from 1400 to 2200 mm




The 3-point hitch mounted RAMA model, is suitable for shredding grass, vine branches, pruning, wood, etc. It is suitable to be used in vineyards and can be equipped with rear raking teeth suitable to increase the product fragmentation.

| CODE |  |  |  |  |  |  |  |  |  |  | | |
|----------|---|---|---|---|---|--|---|---|---|---|-----|------|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C |
| 2922.140 | 1400 | 650 950 | 28 40 | 4 | 540 | 490 | 4 | 16 | 32 | 1600 | 950 | 1100 |
| 2922.160 | 1600 | 650 950 | 28 40 | 4 | 540 | 530 | 4 | 16 | 32 | 1800 | 950 | 1100 |
| 2922.180 | 1800 | 650 950 | 32 45 | 4 | 540 | 550 | 4 | 20 | 40 | 2000 | 950 | 1100 |
| 2922.200 | 2000 | 820 1180 | 36 50 | 4 | 540 | 590 | 4 | 24 | 48 | 2200 | 950 | 1100 |
| 2922.220 | 2200 | 820 1180 | 44 60 | 4 | 540 | 650 | 4 | 24 | 48 | 2400 | 950 | 1100 |

RAMA 5 RAMA shredder, working width from 2600 to 3000 mm



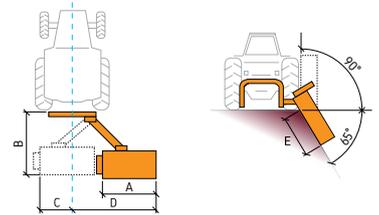
The 3-point hitch mounted RAMA model, is suitable for shredding grass, vine branches, pruning, wood, etc. It is suitable to be used in vineyards and can be equipped with rear raking teeth suitable to increase the product fragmentation.

| CODE |  |  |  |  |  |  |  |  |  |  | | |
|----------|---|---|---|---|---|--|---|---|---|---|-----|------|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C |
| 2922.260 | 2600 | 1220 1470 | 60 80 | 5 | 540 | 740 | 5 | 24 | 48 | 2800 | 950 | 1100 |
| 2922.280 | 2750 | 1220 1470 | 68 90 | 5 | 540 | 790 | 5 | 24 | 48 | 2950 | 950 | 1100 |
| 2922.300 | 3000 | 1220 1470 | 75 100 | 5 | 540 | 850 | 5 | 28 | 56 | 3200 | 950 | 1100 |

RIVA-E 1 Broyeur latéral



The RIVA-E version, is a light side-working shredder, suitable for small tractors, ideal for grass mulching on gardens and parks.

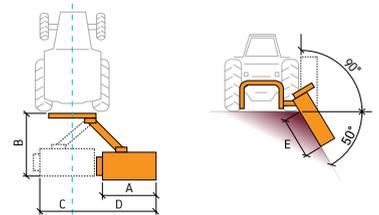


| CODE | | | | | | | | | | | | | | | |
|----------|------|------|----|----|-----|----|------|-----|----|----|----|------|-----|------|------|
| | mm | mm | kw | hp | kg | n° | n/1' | kg | n° | n° | n° | B | C | D | E |
| 2910.120 | 1200 | 1550 | 38 | 35 | 800 | 2 | 540 | 280 | 1 | 16 | - | 1700 | 630 | 2550 | 1100 |

RIVA 2 / RIVA-E 2 Side shredder working width from 1200 to 1800 mm



The RIVA 2 model, is a semi-professional side-working shredder. Suitable for grass mulching and for the maintenance of ditches, hedges and parks. Available in the following configurations: Internal or external gear-box.



RIVA 2 - Internal gear-box

| CODE | | | | | | | | | | | | | | | |
|----------|------|------|----|----|------|----|------|-----|----|----|----|------|-----|------|------|
| | mm | mm | kw | hp | kg | n° | n/1' | kg | n° | n° | n° | B | C | D | E |
| 2914.120 | 1200 | 1400 | 35 | 48 | 1200 | 3 | 540 | 380 | 2 | 12 | 24 | 1680 | 600 | 2130 | 790 |
| 2914.140 | 1400 | 1600 | 35 | 48 | 1200 | 3 | 540 | 400 | 2 | 16 | 32 | 1680 | 600 | 2330 | 990 |
| 2914.160 | 1600 | 1800 | 35 | 48 | 1200 | 3 | 540 | 420 | 2 | 20 | 40 | 1680 | 600 | 2530 | 1190 |
| 2914.180 | 1800 | 2000 | 40 | 55 | 1500 | 3 | 540 | 450 | 2 | 24 | 48 | 1680 | 600 | 2730 | 1390 |

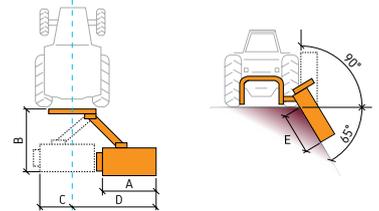
RIVA-E 2 - External gear-box

| CODE | | | | | | | | | | | | | | | |
|----------|------|------|----|----|------|----|------|-----|----|----|----|------|-----|------|------|
| | mm | mm | kw | hp | kg | n° | n/1' | kg | n° | n° | n° | B | C | D | E |
| 2915.120 | 1200 | 1630 | 35 | 48 | 1300 | 3 | 540 | 400 | 2 | 12 | 24 | 1680 | 580 | 2390 | 1050 |
| 2915.140 | 1400 | 1830 | 35 | 48 | 1400 | 3 | 540 | 420 | 2 | 16 | 32 | 1680 | 580 | 2590 | 1250 |
| 2915.160 | 1600 | 2030 | 35 | 48 | 1500 | 3 | 540 | 430 | 2 | 20 | 40 | 1680 | 580 | 2790 | 1450 |
| 2915.180 | 1800 | 2230 | 40 | 55 | 1600 | 3 | 540 | 470 | 2 | 24 | 48 | 1680 | 580 | 2990 | 1650 |

RIVA 3 / RIVA-E 3 Side shredder working width from 1400 to 2200 mm



The RIVA 3 shredder is designed for professional use. It is suitable for the maintenance of road sides, banks, ditches and hedges. The shredded residues are ejected behind the self-cleaning support roller. The machine moves on self-lubricating metal bushings.



RIVA 3 - Internal gear-box

| CODE |  mm |  mm |  | kw | hp | kg |  |  |  |  |  |  | B | C | D | E |
|----------|---|---|---|----|------|----|---|---|---|---|---|---|-----|------|------|---|
| | mm | mm | | | | | n° | n/1' | kg | n° | n° | n° | | | | |
| 2911.140 | 1400 | 1580 | 55 | 75 | 2100 | 3 | 540 | 530 | 3 | 16 | 32 | 2000 | 900 | 2350 | 1300 | |
| 2911.160 | 1600 | 1780 | 60 | 80 | 2200 | 3 | 540 | 580 | 3 | 20 | 40 | 2000 | 900 | 2350 | 1500 | |
| 2911.180 | 1800 | 1980 | 63 | 85 | 2300 | 4 | 540 | 610 | 3 | 20 | 40 | 2000 | 900 | 2350 | 1700 | |
| 2911.200 | 2000 | 2180 | 66 | 90 | 2400 | 4 | 540 | 650 | 3 | 24 | 48 | 2000 | 900 | 2350 | 1900 | |
| 2911.220 | 2200 | 2380 | 69 | 95 | 2500 | 5 | 540 | 700 | 3 | 24 | 48 | 2000 | 900 | 2350 | 2100 | |

RIVA-E 3 - External gear-box

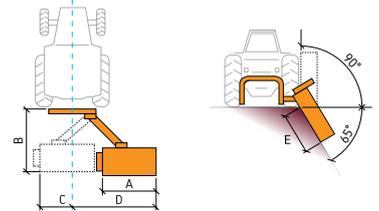
| CODE |  mm |  mm |  | kw | hp | kg |  |  |  |  |  |  | B | C | D | E |
|----------|---|---|---|----|------|----|---|---|---|---|---|---|-----|------|------|---|
| | mm | mm | | | | | n° | n/1' | kg | n° | n° | n° | | | | |
| 2912.140 | 1400 | 1890 | 55 | 75 | 2300 | 3 | 540 | 550 | 3 | 16 | 32 | 2000 | 560 | 2650 | 1600 | |
| 2912.160 | 1600 | 2090 | 60 | 80 | 2400 | 3 | 540 | 600 | 3 | 20 | 40 | 2000 | 560 | 2850 | 1800 | |
| 2912.180 | 1800 | 2290 | 63 | 85 | 2500 | 4 | 540 | 630 | 3 | 20 | 40 | 2000 | 560 | 3050 | 2000 | |
| 2912.200 | 2000 | 2490 | 66 | 90 | 2600 | 4 | 540 | 670 | 3 | 24 | 48 | 2000 | 560 | 3250 | 2200 | |
| 2912.220 | 2200 | 2690 | 69 | 95 | 2700 | 5 | 540 | 690 | 3 | 24 | 48 | 2000 | 560 | 3450 | 2400 | |

RIVA-E 4 Side shredder working width from 1600 to 2600 mm



NEW

The RIVA-E 4 shredder is designed for professional use. It is suitable for the maintenance of road sides, banks, ditches and hedges. The shredded residues are ejected behind the self-cleaning support roller. The machine moves on self-lubricating metal bushings.



| CODE | | | | | | | | | | | | | | | |
|----------|------|------|----|-----|------|----|------|------|----|----|------|------|-----|------|------|
| | mm | mm | kw | hp | kg | n° | n/1' | kg | n° | n° | n° | B | C | D | E |
| 2926.160 | 1600 | 2120 | 60 | 82 | 2500 | 4 | 540 | 970 | 4 | 16 | 2270 | 2270 | 340 | 2750 | 1370 |
| 2926.180 | 1800 | 2320 | 60 | 82 | 3000 | 4 | 540 | 990 | 4 | 20 | 2270 | 2270 | 340 | 2950 | 1570 |
| 2926.200 | 2000 | 2520 | 66 | 90 | 3400 | 4 | 540 | 1030 | 4 | 24 | 2270 | 2270 | 340 | 3150 | 1770 |
| 2926.220 | 2200 | 2720 | 74 | 100 | 3900 | 4 | 540 | 1090 | 4 | 24 | 2270 | 2270 | 340 | 3350 | 1970 |
| 2926.260 | 2600 | 3120 | 81 | 110 | 4400 | 5 | 540 | 1180 | 5 | 24 | 2270 | 2270 | 340 | 3750 | 2370 |

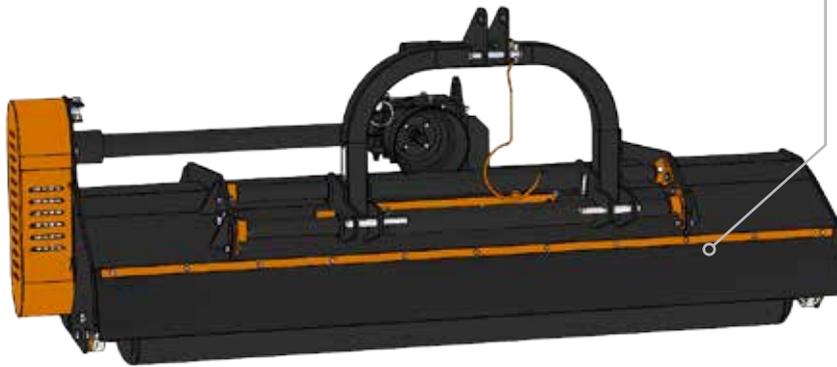
TWIN 2 Reversible shredder, working width from 1200 to 1800 mm




3-point hitch mounted shredder. Supplied with mobile blades, suitable for shredding branches and wood up to 5 cm. diameter Double 3-point hitch shifting on self-lubricating bushings.

| CODE | | | | | | | | | | | | | | |
|----------|------|------------|--------------|----|----|------|-----|-----|----|----|----|------|------|-----|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C | |
| 2906.120 | 1200 | 615 870 | 717 462 | 15 | 20 | 3 | 540 | 270 | 2 | 12 | 24 | 1360 | 1050 | 880 |
| 2906.140 | 1400 | 615 870 | 917 662 | 19 | 25 | 3 | 540 | 300 | 2 | 16 | 32 | 1560 | 1050 | 880 |
| 2906.160 | 1600 | 615 870 | 1117 862 | 22 | 30 | 3 | 540 | 310 | 2 | 20 | 40 | 1760 | 1050 | 880 |
| 2906.180 | 1800 | 615 870 | 1317 1062 | 29 | 40 | 3 | 540 | 350 | 2 | 24 | 48 | 1960 | 1050 | 880 |

TWIN 3 Reversible shredder, working width from 1800 to 2200 mm




3-point hitch mounted shredder. Supplied with mobile blades, suitable for shredding branches and wood up to 5 cm. diameter Double 3-point hitch shifting on self-lubricating bushings.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|---|---|---|---|---|----|------|------|------|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C | |
| 2916.180 | 1800 | 760 900 | 1180 1040 | 30 | 40 | 4 | 540 | 400 | 3 | 20 | 40 | 1940 | 1200 | 1000 |
| 2916.200 | 2000 | 860 1000 | 1280 1140 | 36 | 50 | 4 | 540 | 480 | 3 | 24 | 48 | 2140 | 1200 | 1000 |
| 2916.220 | 2200 | 960 1100 | 1380 1240 | 44 | 60 | 4 | 540 | 460 | 3 | 24 | 48 | 2340 | 1200 | 1000 |

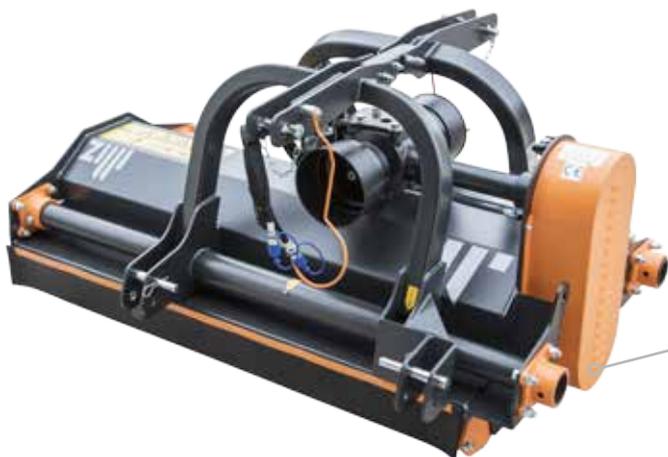
TWIN 4 Reversible shredder working width from 1600 to 2200 mm




3-point hitch mounted shredder. Supplied with mobile blades suitable for shredding branches, brambles, bushes and working on uncultivated areas, suitable for wood up to 8 cm diameter. Double 3-point hitch sliding on self-lubricating guides.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|---|---|---|---|---|----|------|-----|------|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C | |
| 2923.160 | 1600 | 650 950 | 1150 850 | 28 | 40 | 4 | 540 | 530 | 4 | 16 | 32 | 1800 | 950 | 1120 |
| 2923.180 | 1800 | 650 950 | 1350 1050 | 32 | 45 | 4 | 540 | 550 | 4 | 20 | 40 | 2000 | 950 | 1120 |
| 2923.200 | 2000 | 820 1180 | 1380 1020 | 36 | 50 | 4 | 540 | 590 | 4 | 24 | 48 | 2200 | 950 | 1120 |
| 2923.220 | 2200 | 820 1180 | 1580 1220 | 44 | 60 | 4 | 540 | 650 | 4 | 24 | 48 | 2400 | 950 | 1120 |

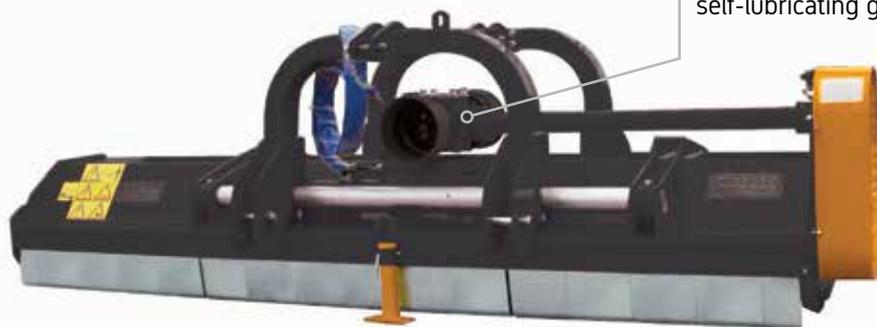
TWIN-SO 4 Offset and reversible shredder with working width from 1600 to 2000 mm




3-point hitch mounted shredder. Supplied with mobile blades, suitable for shredding branches and wood up to 6 cm diameter.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|--|---|---|---|---|----|------|-----|------|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C | |
| 2924.160 | 1600 | 960 1390 | 870 500 | 28 | 40 | 4 | 540 | 550 | 4 | 16 | 32 | 1830 | 950 | 1120 |
| 2924.180 | 1800 | 1160 1590 | 870 500 | 32 | 45 | 4 | 540 | 570 | 4 | 20 | 40 | 2030 | 950 | 1120 |
| 2924.200 | 2000 | 1360 1790 | 870 500 | 36 | 50 | 4 | 540 | 610 | 4 | 24 | 48 | 2230 | 950 | 1120 |

TWIN 5 Reversible shredder working width from 2600 to 3000 mm

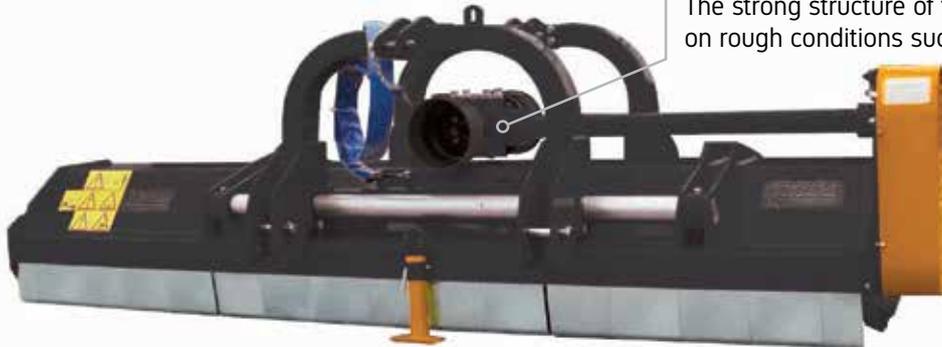


Supplied with mobile blades suitable for shredding branches, brambles, bushes and working on uncultivated areas, suitable for wood up to 8 cm diameter. Double 3-point hitch sliding on self-lubricating guides.

| CODE |  |  |  |  |  |  |  |  |  |  | | | | |
|----------|---|---|---|---|---|--|---|---|---|---|----|------|-----|------|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C | |
| 2923.260 | 2600 | 1220 1470 | 1580 1330 | 60 | 80 | 5 | 540 | 740 | 5 | 24 | 48 | 2800 | 950 | 1120 |
| 2923.280 | 2750 | 1220 1470 | 1780 1530 | 68 | 90 | 5 | 540 | 790 | 5 | 24 | 48 | 3000 | 950 | 1120 |
| 2923.300 | 3000 | 1220 1470 | 1980 1730 | 75 | 100 | 5 | 540 | 920 | 5 | 28 | 56 | 3200 | 950 | 1120 |

TWIN-5 PRO Professional reversible shredder, working width from 2600 to 3000 mm

Professional shredder provided with blades suitable to cut grass, stalks, bushes and wood up to 9 cm diameter. It can also be used on tractors with reversible driving position. The strong structure of the machine, allows the user to work on rough conditions such as uncultivated land.



| CODE | | | | | | | | | | | | | | |
|----------|------|--------------|--------------|-----|------|----|------|------|----|----|----|------|-----|------|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2913.260 | 2600 | 1220 1470 | 1580 1330 | 113 | 150 | 5 | 1000 | 1170 | 5 | 24 | 48 | 2800 | 950 | 1120 |
| 2913.280 | 2800 | 1220 1470 | 1780 1530 | 113 | 150 | 5 | 1000 | 1210 | 5 | 24 | 48 | 3000 | 950 | 1120 |
| 2913.300 | 3000 | 1220 1470 | 1980 1730 | 113 | 150 | 5 | 1000 | 1320 | 5 | 28 | 56 | 3200 | 950 | 1120 |

DECA Heavy duty shredder, working width from 2300 to 3000 mm



Strong and compact 3-point hitch mounted shredder. Ideal for grass, wood and corn stalks shredding, even in difficult and heavy working conditions.

| CODE | | | | | | | | | | | | | | |
|----------|------|--------------|--------------|----|------|----|-----|------|----|----|----|------|------|------|
| | mm | mm | kw hp | n° | n/1' | kg | n° | n° | n° | A | B | C | | |
| 2903.230 | 2300 | 740 1330 | 1770 1180 | 57 | 75 | 5 | 540 | 870 | 6 | 24 | 48 | 2510 | 1095 | 1385 |
| 2903.260 | 2600 | 880 1480 | 1930 1330 | 60 | 80 | 5 | 540 | 980 | 6 | 28 | 56 | 2810 | 1095 | 1385 |
| 2903.280 | 2750 | 960 1560 | 2000 1400 | 68 | 90 | 5 | 540 | 1080 | 6 | 28 | 56 | 2960 | 1095 | 1385 |
| 2903.300 | 3000 | 1080 1680 | 2130 1530 | 75 | 100 | 5 | 540 | 1200 | 6 | 32 | 64 | 3210 | 1095 | 1385 |

DAGA Shredder, working width from 1600 to 3000 mm



3-point hitch mounted shredder, suggested for chopping corn stalks, sugar beet leaves, straw and other. Rear hatch opening (for inspection only). Shifting 3-point hitch.

| CODE | | | | | | | | | | | | |
|----------|------|----|-----|----|------|------|----|----|----|------|-----|------|
| | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C |
| 2901.200 | 2000 | 40 | 55 | 4 | 540 | 680 | 4 | 20 | 40 | 2240 | 960 | 1600 |
| 2901.230 | 2300 | 48 | 65 | 4 | 540 | 770 | 5 | 28 | 56 | 2540 | 960 | 1600 |
| 2901.260 | 2600 | 50 | 70 | 5 | 540 | 830 | 5 | 28 | 56 | 2840 | 960 | 1600 |
| 2901.280 | 2750 | 60 | 80 | 5 | 540 | 900 | 5 | 28 | 56 | 3000 | 960 | 1600 |
| 2901.300 | 3000 | 75 | 100 | 6 | 540 | 1100 | 6 | 32 | 64 | 3200 | 960 | 1600 |

DAGA-V Shredder with folding tool bar, working width from 4800 to 6000 mm

3-point hitch mounted shredder with hydraulic folding tool bar. Recommended for chopping corn stalks, sugar beet leaves, straw and others. Very strong frame, remains within road transport width.




| CODE | | | | | | | | | | | | | | |
|----------|------|------|-------------|-----|-----|----|------|------|----|----|-----|------|------|------|
| | mm | mm | mm | kw | hp | n° | n/1' | kg | n° | n° | n° | A | B | C |
| 2950.480 | 4750 | 2390 | 2400 — 2400 | 110 | 150 | 10 | 1000 | 2400 | 5 | 56 | 112 | 5220 | 1570 | 1600 |
| 2950.600 | 5800 | 2400 | 2400 — 2900 | 145 | 200 | 10 | 1000 | 2900 | 6 | 72 | 144 | 6220 | 1570 | 1600 |

IDRA Shredder, working width from 1200 to 1600 mm



The IDRA model is hydraulically driven. Suitable for grass mulching and shredding thin wood.


| CODE |  mm |  Lt |  bar |  n/1' |  kg |  n° |  n° |  | | |
|----------|---|---|--|---|---|---|---|---|-----|-----|
| | | | | | | | | A | B | C |
| 2907.120 | 1200 | 36 | 180 | 2050 | 240 | 2 | 20 | 1330 | 710 | 950 |
| 2907.140 | 1400 | 36 | 180 | 2050 | 270 | 2 | 24 | 1530 | 710 | 950 |
| 2907.160 | 1600 | 36 | 180 | 2050 | 300 | 2 | 28 | 1730 | 710 | 950 |

IDRA-M Shredding machine with cardan shaft drive, from 1200 to 1600 mm

NEW



IDRA-M is a shredding machine with cardan shaft drive for small size tractors. Suitable for grass mulching and shredding thin wood.

| CODE |  mm |  kw |  hp |  PTO |  kg |  n° |  n° |  | | |
|----------|---|---|---|--|---|---|---|---|-----|-----|
| | | | | | | | | A | B | C |
| 2917.120 | 1200 | 26 | 35 | 2050 | 255 | 2 | 20 | 1330 | 710 | 950 |
| 2917.140 | 1400 | 28 | 38 | 2050 | 285 | 2 | 24 | 1530 | 710 | 950 |
| 2917.160 | 1600 | 36 | 40 | 2050 | 315 | 2 | 28 | 1730 | 710 | 950 |

FILO Rotating blade mulcher



Variable working width mulcher, designed to adapt to any row distances of vineyards and orchards in general. The strong structure has been designed to work also in difficult inter-row conditions. The low frame allows the machine to pass under the vegetation without causing damages.

| CODE | | | | | | | | | | | | |
|----------|------|------|----|----|----|------|-----|----|----------|----------|-----|------|
| | mm | mm | kw | hp | n° | n/1' | kg | n° | A (min.) | A (max.) | B | C |
| 2812.140 | 1400 | 1900 | 44 | 60 | - | 540 | 780 | 4 | 1520 | 2000 | 970 | 1900 |
| 2812.170 | 1700 | 2300 | 55 | 75 | - | 540 | 860 | 4 | 1790 | 2390 | 970 | 2050 |



GRUBBERS



SUSTE Vibro-cultivator

The SUSTE vibro-cultivator, with a strong toolbar, suitable to working on heavy soils, is the ideal solution for seedbed preparation. It is equipped with flexible tines arranged in 4 rows, front levelling blade and double rear refining roller.


Fixe tool bar

| CODE | | | | | | | | | |
|-----------------|------|------|----|----|-----|----|------|------|------|
| | mm | mm | kw | hp | kg | n° | A | B | C |
| 4200.222 | 2220 | 2220 | 60 | 80 | 520 | 21 | 2500 | 1100 | 2400 |

Hydraulic tool bar

| CODE | | | | | | | | | |
|-----------------|------|------|-----|-----|------|----|------|------|------|
| | mm | mm | kw | hp | kg | n° | A | B | C |
| 4201.410 | 4080 | 4080 | 90 | 120 | 1280 | 39 | 4430 | 1950 | 2400 |
| 4201.600 | 6000 | 6000 | 120 | 160 | 1700 | 55 | 6150 | 1910 | 2400 |

COLTA Ripper with Chisel type blades



The COLTA grubber, of modern conception, consists of a heavy-duty structure, particularly suitable for hard and stony soils. With its working precision and reliability, it is the ideal solution for seedbed preparation.

Basic version

| CODE | | | | | | | | | |
|----------|------|------|-----|-----|------|----|------|---|------|
| | mm | mm | kw | hp | kg | n° | A | B | C |
| 41013515 | 2500 | 3650 | 112 | 150 | 1050 | 15 | 2530 | - | 1680 |
| 41014017 | 2500 | 4270 | 120 | 150 | 1140 | 17 | 2530 | - | 1680 |
| 41014519 | 2500 | 4660 | 135 | 160 | 1200 | 19 | 2530 | - | 1680 |
| 41015021 | 2500 | 5300 | 150 | 180 | 1300 | 21 | 2530 | - | 1680 |

Version with roller

| CODE | | | | | | | | | |
|----------|------|------|-----|-----|------|----|------|---|------|
| | mm | mm | kw | hp | kg | n° | A | B | C |
| 41023515 | 2500 | 3650 | 112 | 150 | 1390 | 15 | 2530 | - | 2300 |
| 41024017 | 2500 | 4270 | 120 | 150 | 1540 | 17 | 2530 | - | 2300 |
| 41024519 | 2500 | 4660 | 135 | 160 | 1640 | 19 | 2530 | - | 2300 |
| 41025021 | 2500 | 5300 | 150 | 180 | 1800 | 21 | 2530 | - | 2300 |

Version with roller and levelling blade

| CODE | | | | | | | | | |
|----------|------|------|-----|-----|------|----|------|---|------|
| | mm | mm | kw | hp | kg | n° | A | B | C |
| 41033515 | 2500 | 3650 | 112 | 150 | 1750 | 15 | 2530 | - | 2540 |
| 41034017 | 2500 | 4270 | 120 | 150 | 1900 | 17 | 2530 | - | 2540 |
| 41034519 | 2500 | 4660 | 135 | 160 | 1980 | 19 | 2530 | - | 2540 |
| 41035021 | 2500 | 5300 | 150 | 180 | 2140 | 21 | 2530 | - | 2540 |

PLANTERS




SEED-ON Manual single row planter



Manual single-seed drill for vegetable garden or open field, very easy to use. The seed plate positioned on the bottom of the seed hopper, is simply operated by lifting and lowering the seed drill with its handle.



| CODE |  |  |  |  | | |
|----------|---|---|---|---|-----|-----|
| | n° | kg | L | A | B | C |
| 22500001 | 1 | 1,9 | 0,8 | 230 | 860 | 150 |

ZFS Single row manual planter

The ZFS is a single row mechanical planter equipped with a metering unit that can handle seeds of various sizes and place them at different spacings according to needs. The metering unit drive, is given directly by the double disc coulters with which the planting unit is equipped. Each planting unit can also be equipped with a granular fertilizer hopper. The ZFS can be fitted to a motocultivator or motorhoe in one or two rows version, with the relevant linkage device.



| CODE |  |  |  | |  | | |
|----------|---|---|---|--------|---|-----|-----|
| | n° | kg | semi | spandi | A | B | C |
| 22050001 | 1 | 15 | 8 | - | 490 | 710 | 350 |
| 22060001 | 1 | 20 | 8 | 11 | 630 | 710 | 350 |

ZFM Single seed planter multi-rows



The ZFM is a mechanical single seed planter suitable for small tractors. It can be supplied in different versions, from 2 to 6 rows. The ZFM can handle seeds of various sizes and place them at different spacings depending on the seed plate used. The metering unit drive, is given directly by the double disc coulters with which the planting unit is equipped.

Basic version

| CODE |  |  |  | |  | |  | |  | | |
|----------|---|---|---|----|---|-------|---|-------|---|------|------|
| | n° | cm | kw | hp | base | ferti | seed | ferti | A | B | C |
| 2207.752 | 2 | 40-75 | 22 | 30 | 130 | - | 2x8 | - | 1200 | 1170 | 1500 |
| 2207.753 | 3 | 40-75 | 30 | 40 | 200 | - | 3x8 | - | 2200 | 1170 | 1500 |
| 2207.754 | 4 | 40-75 | 45 | 60 | 290 | - | 4x8 | - | 2420 | 1170 | 1500 |
| 2207.756 | 6 | 40-75 | 60 | 80 | 380 | - | 6x8 | - | 4000 | 1170 | 1500 |

Version with fertilizer

| CODE |  |  |  | |  | |  | |  | | |
|----------|---|---|---|----|---|-------|---|-------|---|------|------|
| | n° | cm | kw | hp | base | ferti | seed | ferti | A | B | C |
| 2208.752 | 2 | 40-75 | 22 | 30 | 130 | 200 | 2x8 | 200 | 1200 | 1170 | 1500 |
| 2208.753 | 3 | 40-75 | 30 | 40 | 200 | 270 | 3x8 | 380 | 2200 | 1170 | 1500 |
| 2208.754 | 4 | 40-75 | 45 | 60 | 290 | 360 | 4x8 | 380 | 2420 | 1170 | 1500 |
| 2208.756 | 6 | 40-75 | 60 | 80 | 380 | 460 | 6x8 | 480 | 4000 | 1170 | 1500 |

CULTIVATORS




FLEXA-F Rigid toolbar row-crop cultivator




Row-crop cultivator with rigid toolbar, available from 3 to 12 rows. Cultivating units with 3 or 5 tines depending on the row spacing. The versions with fertilizer are available with a single stainless-steel tank of 700, 1000 or 2000 Liters capacity.

Basic version

| CODE |  |  |  |  |  |  | | |
|----------|--|--|--|--|---|--|------|------|
| | n° | cm | hp | kg | L | A | B | C |
| 3102.753 | 3 | 70-75 | 50 | 580 | - | 2750 | 1300 | 1800 |
| 3102.754 | 4 | 70-75 | 55 | 650 | - | 3500 | 1300 | 1800 |
| 3102.456 | 6 | 45-50 | 55 | 800 | - | 3400 | 1300 | 1800 |
| 3102.756 | 6 | 70-75 | 65 | 950 | - | 5000 | 1300 | 1800 |
| 3102.458 | 8 | 45-50 | 65 | 1000 | - | 4800 | 1300 | 1800 |
| 3102.45C | 12 | 45-50 | 90 | 1200 | - | 6300 | 1300 | 1800 |
| 3102.758 | 8 | 70-75 | 90 | 1100 | - | 6500 | 1300 | 1800 |
| 3102.75C | 12 | 70-75 | 100 | 1300 | - | 9000 | 1300 | 1800 |

Version with volumetric fertilizer distribution


| CODE |  |  |  |  |  |  | | |
|----------|---|---|---|---|--|---|------|------|
| | n° | cm | hp | kg | L | A | B | C |
| 3104.754 | 4 | 70-75 | 70 | 900 | 700 | 3500 | 1800 | 1800 |
| 3104.456 | 6 | 45-50 | 70 | 1050 | 700 | 3400 | 1800 | 1800 |
| 3104.756 | 6 | 70-75 | 75 | 1270 | 1000 | 5000 | 1800 | 1800 |
| 3104.458 | 8 | 45-50 | 75 | 1250 | 1000 | 4800 | 1800 | 1800 |
| 3104.45C | 12 | 45-50 | 100 | 1720 | 2000 | 6300 | 1800 | 1800 |
| 3104.758 | 8 | 70-75 | 100 | 1600 | 2000 | 6500 | 1800 | 1800 |
| 3104.75C | 12 | 70-75 | 100 | 1980 | 2000 | 9000 | 1800 | 1800 |

FLEXA-M Row-crop cultivator with hydraulic folding toolbar




Row-crop weeder with cultivating units equipped with 3 or 5 working tines, depending on the row-spacing. The versions with fertilizer are equipped with a 400 Liters single stainless-steel tank. The external cultivating units can be hydraulically folded from the tractor.

Basic version

| CODE |  |  |  |  |  |  | | | |
|----------|---|---|---|---|--|---|------|------|------|
| | n° | cm | kw | hp | kg | L | A | B | C |
| 3202.754 | 4 | 70-75 | 45 | 60 | 700 | - | 3480 | 1410 | 1800 |
| 3202.456 | 6 | 45-50 | 45 | 60 | 800 | - | 3480 | 1410 | 1800 |

Version with volumetric fertilizer distribution

| CODICE |  |  |  |  |  |  | | | |
|----------|---|---|---|---|--|---|------|------|------|
| | n° | cm | kw | hp | kg | L | A | B | C |
| 3204.754 | 4 | 70-75 | 60 | 80 | 1000 | 700 | 3480 | 1650 | 1800 |
| 3204.456 | 6 | 45-50 | 60 | 80 | 1100 | 700 | 3480 | 1650 | 1800 |

FLEXA-V Row-crop cultivator with hydraulic folding toolbar



Row-crop cultivator with vertically folding toolbar. Cultivating units equipped with 3 or 5 working tines, depending on the row-spacing. The versions with fertilizer are equipped with a single, stainless-steel 1000 Liters tank.

Basic version

| CODE | | | | | | | | | |
|----------|----|-------|----|----|------|---|------|------|------|
| | n° | cm | kw | hp | kg | L | A | B | C |
| 3302.756 | 6 | 70-75 | 55 | 75 | 1000 | - | 5150 | 1400 | 1820 |
| 3302.458 | 8 | 45-50 | 55 | 75 | 1220 | - | 5150 | 1400 | 1820 |
| 3302.758 | 8 | 70-75 | 60 | 80 | 1250 | - | 6150 | 1400 | 1820 |
| 3302.45C | 12 | 45-50 | 66 | 90 | 1510 | - | 6150 | 1400 | 1820 |

Version with volumetric fertilizer distribution

| CODE | | | | | | | | | |
|----------|----|-------|----|----|------|------|------|------|------|
| | n° | cm | kw | hp | kg | L | A | B | C |
| 3304.756 | 6 | 70-75 | 60 | 80 | 1310 | 1000 | 5150 | 1800 | 2330 |
| 3304.458 | 8 | 45-50 | 60 | 80 | 1550 | 1000 | 5150 | 1800 | 2330 |
| 3304.758 | 8 | 70-75 | 66 | 90 | 1580 | 1000 | 6150 | 1800 | 2330 |


FERTILIZER



FERTICROP Fertilizer applicator




Fertilizer for localized distribution of granular products. FERTICROP is equipped with rigid toolbar, stainless steel tank of different capacities and available in 4, 6 and 8 rows. Depending on the tank capacity, the transport widths, varies from 2.00 to 2.48 m.

| CODE |  |  |  | |  |  |  | | |
|----------|---|---|---|----|---|---|---|------|------|
| | mm | n° | kw | hp | kg | L | A | B | C |
| 1600.204 | 2010 | 4 | 30 | 40 | 102 | 360 | 2010 | 1100 | 650 |
| 1600.206 | 2010 | 6 | 30 | 40 | 102 | 360 | 2010 | 1100 | 650 |
| 1600.234 | 2300 | 4 | 53 | 70 | 215 | 800 | 2300 | 1550 | 950 |
| 1600.256 | 2480 | 6 | 60 | 80 | 235 | 1000 | 2480 | 1550 | 950 |
| 1600.258 | 2500 | 8 | 60 | 80 | 380 | 1000 | 2500 | 1750 | 1050 |

FERTIVITIS Fertiliser burier



FERTIVITIS is a fertilizer spreader that allows to insert the product into the soil between the rows of vineyards or orchards. FERTIVITIS has a rigid toolbar and a stainless-steel tank. The blade coulters are equipped with depth gauge toothed rollers. It is available in 1 or 2 rows version. The working row spacing available on the 2 rows models, is either 1.4 or 2.00 m.

| CODE |  |  |  | |  |  |  | | |
|----------|---|---|---|----|---|---|---|------|-----|
| | mm | n° | kw | hp | kg | L | A | B | C |
| 1700.101 | 1400 | 1 | 22 | 25 | 230 | 240 | 1600 | 1400 | 760 |
| 1700.102 | 1400 | 2 | 30 | 40 | 260 | 240 | 1600 | 1400 | 760 |
| 1700.162 | 2000 | 2 | 38 | 50 | 292 | 360 | 2200 | 1400 | 760 |
| 1700.182 | 2200 | 2 | 44 | 60 | 310 | 360 | 2200 | 1400 | 760 |

MICROLINE Volumetric metering unit

NEW

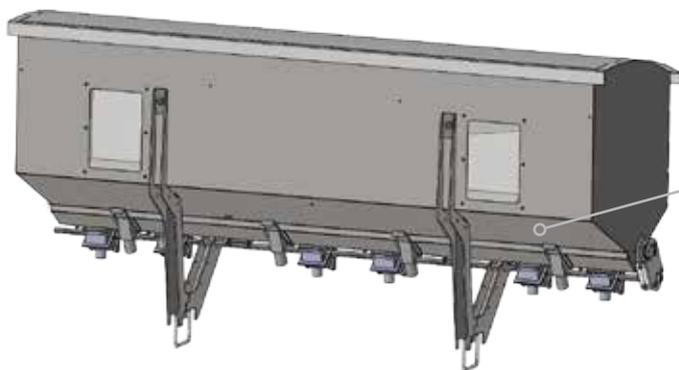


The MICROLINE is a volumetric metering unit suitable for the localized distribution of micro-granular products. A metering roller with flexible cells allows the distribution, while the adjustment is made through a partition controlled by a rotating ring nut. MICROLINE is easily adaptable to any farming machine and can eventually, be supplied with electric drive.

| CODE |  |  |  |  | | |
|----------|---|---|---|---|-----|------|
| | n° | kg | L | A | B | C |
| 13201012 | 1 | - | 12 | 395 | 385 | 180 |
| 13202025 | 2 | - | 25 | 395 | 385 | 360 |
| 13204120 | 4 | - | 120 | 395 | 385 | 1400 |


FERTILINE Fertilizer

NEW




Fertilizer spreader for the distribution of granular products, with volumetric metering unit with mechanical drive and stainless-steel tank. The distribution amount may be adjusted by the metering unit partition or by modifying, electronically or hydraulically the metering unit rounds per minute

Without adjustment

| CODE |  n° |  kg |  L |  | | |
|----------|---|---|--|---|-----|-----|
| | | | | A | B | C |
| 11100704 | 4 | 103 | 700 | 1503 | 775 | 950 |
| 11100706 | 6 | 105 | 700 | 1503 | 775 | 950 |
| 11101004 | 4 | 131 | 1000 | 2203 | 775 | 950 |
| 11101006 | 6 | 133 | 1000 | 2203 | 775 | 950 |
| 11101008 | 8 | 135 | 1000 | 2203 | 775 | 950 |
| 11101406 | 6 | 169 | 1400 | 2883 | 775 | 950 |
| 11101408 | 8 | 198 | 1400 | 2883 | 775 | 950 |
| 11101412 | 12 | 200 | 1400 | 2883 | 775 | 950 |

With adjustment

| CODE |  n° |  kg |  L |  | | |
|----------|---|---|--|---|-----|-----|
| | | | | A | B | C |
| 11200704 | 4 | 108 | 700 | 1503 | 775 | 950 |
| 11200706 | 6 | 110 | 700 | 1503 | 775 | 950 |
| 11201004 | 4 | 136 | 1000 | 2203 | 775 | 950 |
| 11201006 | 6 | 139 | 1000 | 2203 | 775 | 950 |
| 11201008 | 8 | 140 | 1000 | 2203 | 775 | 950 |
| 11201406 | 6 | 201 | 1400 | 2883 | 775 | 950 |
| 11201408 | 8 | 203 | 1400 | 2883 | 775 | 950 |
| 11201412 | 12 | 205 | 1400 | 2883 | 775 | 950 |

ZILLI Srl
Via dei Templari 4, 33080 San Quirino
(Pordenone) ITALY
Tel. +39 043491053 | Fax +39 0434 91414
www.zillisrl.it | e-mail: info@zillisrl.it
CCIAA Pn 103342 | Cod.Fisc. e P.IVA
01772800932
cod. IC0000EN

